


HL-T1 SERIES

Related Information

- General terms and conditions..... P.1
- Sensor selection guide.....P.11~ / P.833~
- Glossary of terms / General precautions ... P.1019 / P.1027
- About laser beam..... P.1025~

- FIBER SENSORS
- LASER SENSORS
- PHOTOELECTRIC SENSORS
- MICRO PHOTOELECTRIC SENSORS
- AREA SENSORS
- SAFETY COMPONENTS
- PRESSURE SENSORS
- INDUCTIVE PROXIMITY SENSORS
- PARTICULAR USE SENSORS
- SENSOR OPTIONS
- WIRE-SAVING SYSTEMS
- MEASUREMENT SENSORS
- STATIC CONTROL DEVICES
- LASER MARKERS

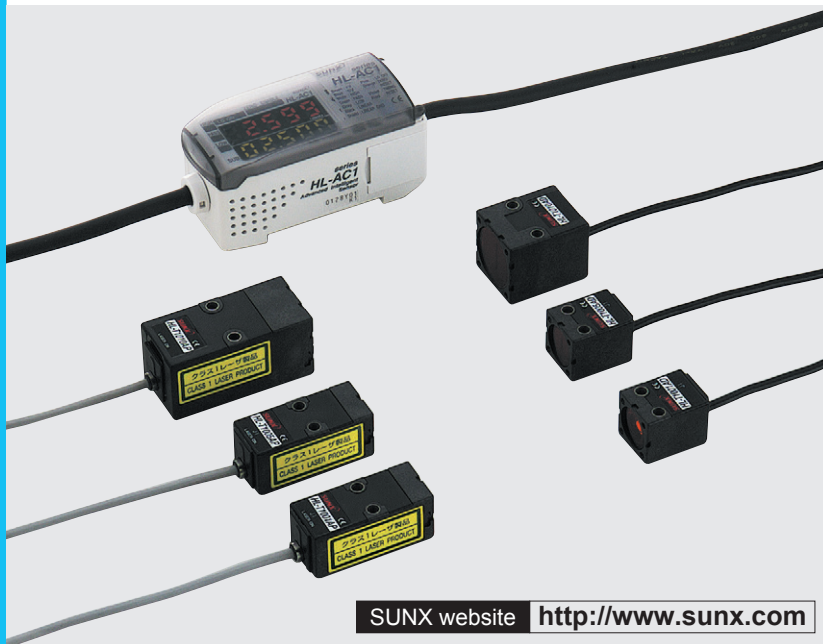

SUNX website <http://www.sunx.com>




This product is classified as a Class 1 Laser Product in IEC / JIS standards and a Class II Laser Product in FDA regulations. Do not look at the laser beam through optical system such as a lens.

Ultra-compact sensor head A high-functionality intelligent controller

Ultra-compact sensor head

The ultra-compact size and yet the high level of performance. These sensors save space.

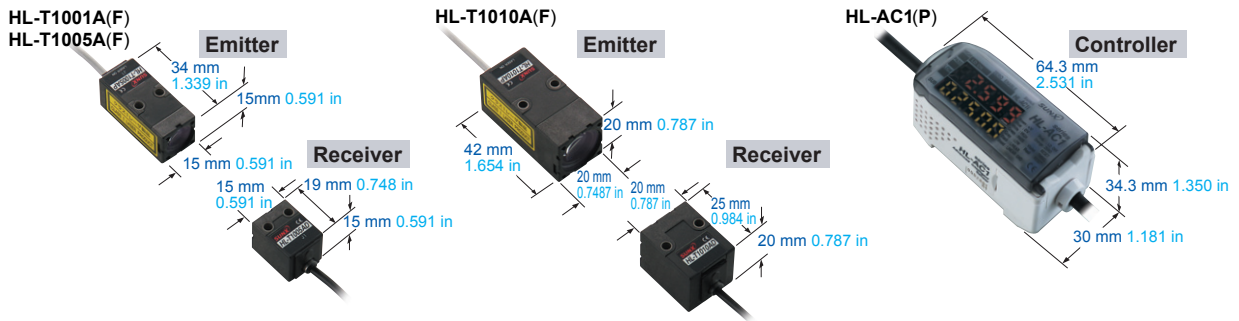


Resolution of 4 μm 0.157 mil

A high resolution of 4 μm **0.157 mil** (at an average 64 cycles) allows high-precision positioning and size judgment.

Long sensing range

Long sensing range of 500 mm **19.685 in** [HL-T1005A(F), HL-T1010A(F)] and 2 m **6.562 ft** [HL-T1001A(F)] are available.


Distinguishing size of electronic components




ORDER GUIDE
P.890~SPECIFICATIONS
P.892~I/O CIRCUIT DIAGRAMS
P.894SENSING CHARACTERISTICS
P.894PRECAUTIONS FOR PROPER USE
P.895DIMENSIONS
P.896~

APPLICATIONS


Checking the positioning of chip components



Detecting defective lead frame seating

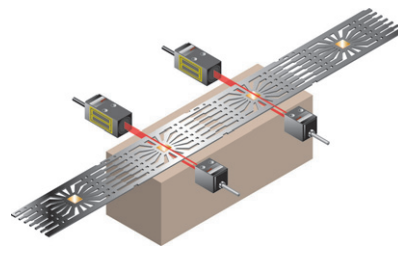

Sensing wafer position in wafer cassette




BASIC PERFORMANCE

High-precision judgment even from minute differences in light intensity

The sensors are sensitive to minute differences in light intensity, so that they can judge even the opacity of glass and turbidity of liquids. In addition, the amount of light received can be displayed as a percentage to allow you to determine permeation rates.

Distinguishing opacity of glass



Minimum sensing object diameter $\varnothing 8 \mu\text{m}$ $\varnothing 0.315 \text{ mil}$

HL-T1001A(F)

The laser with a beam diameter of $\varnothing 1 \text{ mm}$ $\varnothing 0.039 \text{ in}$ can sense extremely small objects with dimensions in micrometers such as bonding wires.



Adoption of a Class 1 laser

The adoption of a Class 1 laser (IEC / JIS) eliminates the need for safety countermeasures, so that these sensors can be used in photo-electric sensor applications with confidence.

FUNCTIONS

Fully equipped with convenient functionality

A wide range of convenient features has been incorporated into the unit's compact body: standard received light setting / auto scaling setting / measurement processing (various timer and hold functions) / differentiation / monitor focus function. These features make the unit useful for a wide variety of applications.


3 types of teaching functions are now available

3 types of teaching functions are available: positioning teaching / 2-level teaching / automatic teaching, thus enabling a variety of applications to be accommodated for many different types of production sites.

Positioning teaching	The actual value measured at the time when teaching is performed is utilized as the threshold value. Best suited for high-precision positioning.
2-level teaching	In this teaching method, an intermediate level between the first and the second teaching levels is utilized as the threshold value. Minute differences, such as changes as small as the thickness of a sheet of paper between the sensing objects, can be detected when this teaching method is utilized.
Automatic teaching	With this teaching method, a series of periodic arbitrarily measurements are taken automatically and an intermediate value, between the maximum and minimum values obtained by this measurement, is utilized as the threshold value. The threshold value is therefore set in relation to the sensing object. Best suited for applications in which teaching must be performed without stopping the current flow of operations.

Detection resolution can be easily confirmed

The current resolution can be easily confirmed by setting the controller to indicate resolution display mode. By displaying the resolution, the marginal increment can be easily determined for the threshold value setting, helping to accurately determine whether sensing can be performed.

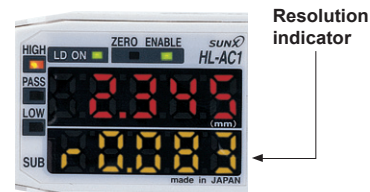

FIBER SENSORS

LASER SENSORS

PHOTOELECTRIC SENSORS

MICRO PHOTOELECTRIC SENSORS

AREA SENSORS

SAFETY COMPONENTS

PRESSURE SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC CONTROL DEVICES

LASER MARKERS

Selection Guide

Laser Displacement

HL-C2

HL-C1

LM10

Magnetic Displacement

GP-X

GP-A

Collimated Beam Sensors

HL-T1

LA-300

LA

Other Products

FIBER SENSORS
LASER SENSORS
PHOTOELECTRIC SENSORS
MICRO PHOTOELECTRIC SENSORS
AREA SENSORS
SAFETY COMPONENTS
PRESSURE SENSORS
INDUCTIVE PROXIMITY SENSORS
PARTICULAR USE SENSORS
SENSOR OPTIONS
WIRE-SAVING SYSTEMS
MEASUREMENT SENSORS
STATIC CONTROL DEVICES
LASER MARKERS
Selection Guide
Laser Displacement
HL-C2
HL-C1
LM10
Magnetic Displacement
GP-X
GP-A
Collimated Beam Sensors
HL-T1
LA-300
LA
Other Products


FUNCTIONS

Analog output is switchable between current / voltage

The analog output can be switched between either of two different outputs; current (4 to 20 mA) / voltage (± 4 V). With the monitor focus function, the output can be adjusted over the range from -5 V to $+5$ V, or from 0 V to $+5$ V, facilitating connectivity with a variety of output devices.

Monitor focus function

The linear output is fully adjustable over the following range (current: 4 to 20 mA / voltage: ± 4 V). The usage of the monitor focus function together with selectable current / voltage switching for the linear output allows for compatibility with a variety of output devices.

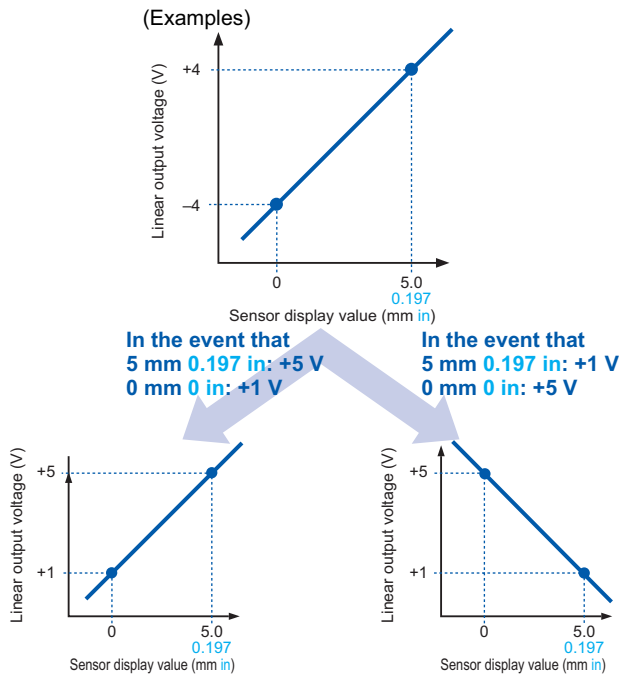


The linear output must be set by determining output values (maximum; current: 0 to 23.5 mA / voltage: ± 5.5 V) at two different points, for the arbitrary display value.

MAINTENANCE

Self-check for laser diode deterioration

The intelligent controller performs self-checking for laser diode deterioration. If the controller detects significant deterioration (end of diode life), an error will be displayed on the main digital display panel. This function enables users to prepare in advance for potential laser diode malfunctions.

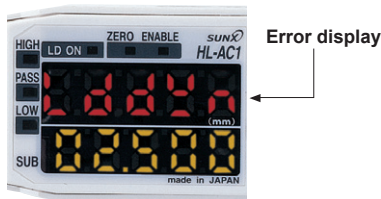

VARIETIES

FDA regulations conforming types are available

FDA regulations conforming types, most suitable for equipment used in the USA, are now available.

FDA : Class II
IEC / JIS : Class 1

OPERABILITY

Superior operability has been achieved

All settings can be easily performed by using the four-way keys and viewing the digital displays.

Large dual digital display

After power up, the measured value (red) and the threshold value (yellow) are displayed (letter height 7 mm 0.276 in)

Judgment output indicators

HIGH (Orange) / PASS (Green) / LOW (Yellow) 3-color display




Easy operation with four-way keys

OPTIONS

Calculations for 2 sensors are possible







The calculation unit (optional) just needs to be connected between the two controllers to enable calculations (addition and subtraction) to be carried out for two sensors. No digital panel controller is needed either.

Sheet width measurement

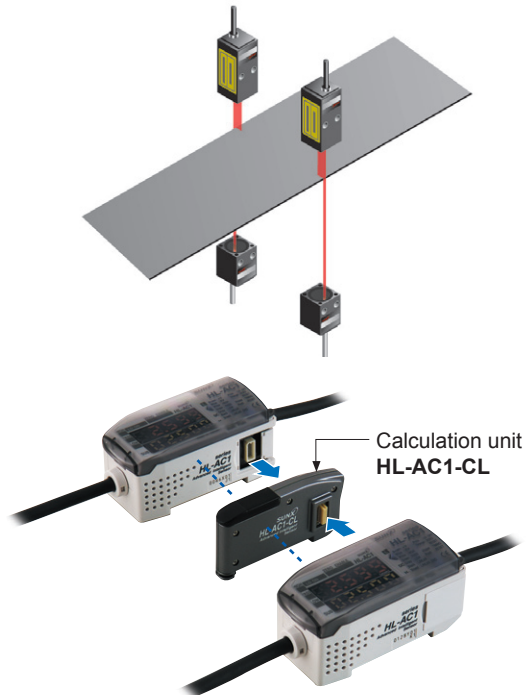

ORDER GUIDE

Sensor heads


Type	Appearance	Sensing range	Sensing width	Min. sensing object	Conforming standards / regulations	Model No.
Beam diameter $\phi 1$ mm $\phi 0.039$ in type		 2 m 6.562 ft	$\phi 1$ mm $\phi 0.039$ in ($\phi 1$ to $\phi 2.5$ mm $\phi 0.039$ to $\phi 0.098$ in at 500 to 2,000 mm 19.685 to 78.740 in sensing range)	$\phi 8$ μm $\phi 0.315$ mil opaque object ($\phi 50$ μm $\phi 1.969$ mil opaque object at 500 to 2,000 mm 19.685 to 78.740 in sensing range)	IEC / JIS	HL-T1001A
					FDA / IEC / JIS	HL-T1001F
Sensing width 5 mm 0.197 in type		 500 mm 19.685 in	5 mm 0.197 in	$\phi 0.05$ mm $\phi 0.002$ in opaque object	IEC / JIS	HL-T1005A
					FDA / IEC / JIS	HL-T1005F
Sensing width 10 mm 0.394 in type		 500 mm 19.685 in	10 mm 0.394 in	$\phi 0.1$ mm $\phi 0.004$ in opaque object	IEC / JIS	HL-T1010A
					FDA / IEC / JIS	HL-T1010F

Note: The model No. with suffix "P" shown on the label affixed to the product is the emitter, "D" shown on the label is the receiver.
(e.g.) Emitter of HL-T1001A: HL-T1001AP, Receiver of HL-T1001A: HL-T1001AD

Accessories

• **MS-HLT1-1**

Sensor mounting bracket
for HL-T1001A(F) /
HL-T1005A(F)
(Note)




Two M3 (length 20 mm 0.787 in)
screws with washers are attached.

Note: 2 sets are required to mount
the emitter / receiver.

• **MS-LA3-1**


Sensor mounting bracket
for HL-T1010A(F)
(Note)



Two M3 (length 25 mm 0.984 in)
screws with washers are attached.

• **CN-HLT1-1**

(Sensor head to controller connection cable)



FIBER
SENSORS

LASER
SENSORS

PHOTO-
ELECTRIC
SENSORS

MICRO
PHOTO-
ELECTRIC
SENSORS

AREA
SENSORS

SAFETY
COMPONENTS

PRESSURE
SENSORS

INDUCTIVE
PROXIMITY
SENSORS

PARTICULAR
USE
SENSORS

SENSOR
OPTIONS

WIRE-
SAVING
SYSTEMS

MEASURE-
MENT
SENSORS

STATIC
CONTROL
DEVICES

LASER
MARKERS

Selection
Guide

Laser
Displacement

HL-C2

HL-C1

LM10

Magnetic
Displacement

GP-X

GP-A

Collimated
Beam Sensors

HL-T1

LA-300


LA

Other
Products

- FIBER SENSORS
- LASER SENSORS
- PHOTO-ELECTRIC SENSORS
- MICRO PHOTO-ELECTRIC SENSORS
- AREA SENSORS
- SAFETY COMPONENTS
- PRESSURE SENSORS
- INDUCTIVE PROXIMITY SENSORS
- PARTICULAR USE SENSORS
- SENSOR OPTIONS
- WIRE-SAVING SYSTEMS
- MEASUREMENT SENSORS
- STATIC CONTROL DEVICES
- LASER MARKERS
- Selection Guide
- Laser Displacement
- HL-C2**
- HL-C1
- LM10
- Magnetic Displacement
- GP-X
- GP-A
- Collimated Beam Sensors
- HL-T1**
- LA-300
- LA
- Other Products

ORDER GUIDE

Controllers

Type	Appearance	Model No.	Output
NPN output		HL-AC1	NPN open-collector transistor (Judgment output) Current / voltage output (Linear output)
PNP output		HL-AC1P	PNP open-collector transistor (Judgment output) Current / voltage output (Linear output)

Calculation unit


Appearance	Model No.
	HL-AC1-CL

OPTIONS

Designation	Model No.	Description	
Side-view attachment	HL-T1SV1	For HL-T1001A(F)/T1005A(F) (1 pc.)	The beam axis can be bent to a right angle making universal mounting possible.
	HL-T1SV2	For HL-T1010A(F) (1 pc.)	
Controller mounting bracket	MS-HLAC1-1	Use when mounting the controller with screws	
Extension cable	HL-T1CCJ4	Length: 4 m 13.123 ft Net weight: 162 g approx.	Extension cable for use between the controller and its cable linking it with the sensor head. Cabtyre cable with connectors on both ends Cable outer diameter: \varnothing 5.2 mm \varnothing0.205 in Connector outer diameter: \varnothing 15.5 mm \varnothing0.610 in max.
	HL-T1CCJ8	Length: 8 m 26.247 ft Net weight: 330 g approx.	

Side-view attachment

- HL-T1SV1
- HL-T1SV2

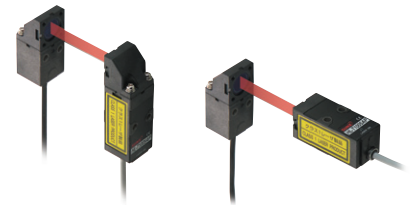


Mounted on both sides

Mounted on one side only


Controller mounting bracket

- MS-HLAC1-1



Extension cable

- HL-T1CCJ4
- HL-T1CCJ8



SPECIFICATIONS**Sensor heads**

Item	Model No.	Type	Beam diameter \varnothing 1 mm 0.039 in type	Sensing width 5 mm 0.197 in type	Sensing width 10 mm 0.394 in type
		IEC / JIS standards conforming type	HL-T1001A	HL-T1005A	HL-T1010A
		FDA regulations conforming type	HL-T1001F	HL-T1005F	HL-T1010F
Applicable controller		HL-AC1, HL-AC1P			
Sensing range		0 to 500 mm 0 to 19.685 in	500 to 2,000 mm 19.685 to 78.74 in	500 mm 19.685 in	
Sensing width		\varnothing 1 mm 0.039 in	\varnothing 1 to \varnothing 2.5 mm 0.039 to 0.098 in	5 mm 0.197 in	10 mm 0.394 in
Min. sensing object		\varnothing 8 μ m 0.315 mil opaque object	\varnothing 50 μ m 1.969 mil opaque object	\varnothing 0.05 mm 0.002 in opaque object	\varnothing 0.1 mm 0.004 in opaque object
Repeatability (During the state in which light is half blocked)		4 μ m 0.157 mil (Note 2)	————	4 μ m 0.157 mil (Note 2)	
Linear output resolution (Note 3)		4 μ m 0.157 mil (Note 2, 4)	————	4 μ m 0.157 mil (Note 2)	
Emission indicator		Green LED (lights up during laser emission)			
Interference prevention function		Two units of sensors can be mounted close together. (When the controller interference prevention function is used)			
Environmental resistance	Pollution degree	3 (industrial environment)			
	Ambient temperature	0 to +50 °C +32 to +122 °F (No dew condensation), Storage: -25 to +70 °C -13 to +158 °F			
	Ambient humidity	35 to 85 % RH, Storage: 35 to 85 % RH			
	Ambient illuminance	Incandescent light: 10,000 lx at the light-receiving face			
	EMC	EN 61000-6-2, EN 61000-6-4			
	Voltage withstandability	1,000 V AC for one min. between all supply terminals connected together and enclosure			
	Insulation resistance	100 M Ω , or more, with 250 V DC megger between all supply terminals connected together and enclosure			
	Vibration resistance	10 to 500 Hz frequency, 1.5 mm 0.059 in amplitude in X, Y and Z directions for two hours each			
Shock resistance		300 m/s ² acceleration (30 G approx.) in X, Y and Z directions for three times each			
Emitting element	IEC / JIS standards conforming type	Red semiconductor laser Class 1 (IEC / JIS) (modulated, max. output: 0.2 mW, peak emission wavelength: 650 nm 0.026 mil)	Red semiconductor laser Class 1 (IEC / JIS) (modulated, max. output: 0.35 mW, peak emission wavelength: 650 nm 0.026 mil)		
	FDA regulations conforming type	Red semiconductor laser Class II (FDA) (modulated, max. output: 0.2 mW, peak emission wavelength: 650 nm 0.026 mil) (IEC / JIS: Class 1)	Red semiconductor laser Class II (FDA) (modulated, max. output: 0.35 mW, peak emission wavelength: 650 nm 0.026 mil) (IEC / JIS: Class 1)		
Material		Enclosure: Polyetherimide, Case cover: Polycarbonate, Front cover: Glass			
Cable		0.09mm ² 3-core shielded cable with connector, 0.5 m 1.640 ft long			
Cable extension		Extension up to total 10 m 32.808 ft is possible, with the optional cable.			
Net weight		Emitter: 15 g approx., Receiver: 15 g approx.		Emitter: 30 g approx., Receiver: 20 g approx.	
Accessories		MS-HLT1-1 (Sensor head mounting bracket): One set of two brackets for both the emitter and the receiver CN-HLT1-1 (Sensor head to controller connection cable): 1 cable Laser beam alignment sticker: 2 pcs. Label set (FDA regulations conforming type only): 1 set		MS-LA3-1 (Sensor head mounting bracket): One set of two brackets for both the emitter and the receiver CN-HLT1-1 (Sensor head to controller connection cable): 1 cable Laser beam alignment sticker: 2 pcs. Label set (FDA regulations conforming type only): 1 set	

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +20 °C **+68 °F**.

2) In case of an average sampling rate of 64 times.

3) Value calculated with the linear output allowance factor ($\pm 3\sigma$) when connected to the controller included in the calculation of the detection width.

4) This value was obtained by converting the range of linear output fluctuation ($\pm 3\sigma$) into a sensing width, assuming that the smallest sensing object blocks the beam at the approximate center of the beam diameter of \varnothing 1 mm **0.039 in**.

Calculation unit

Item	Model No.	HL-AC1-CL
Connected controller	HL-AC1, HL-AC1P	
Current consumption	12 mA or less (supplied from the controller)	
Connecting method	Connector	
Connection indicator	Orange LED (lights up when connected to the controller)	
Environmental resistance	Ambient temperature	0 to +50 °C +32 to +122 °F (No dew condensation), Storage: -15 to +60 °C +5 to +140 °F
	Ambient humidity	35 to 85 % RH, Storage: 35 to 85 % RH
	Voltage withstandability	1,000 V AC for one min. between all supply terminals connected together and enclosure
	Insulation resistance	100 M Ω , or more, with 500 V DC megger between all supply terminals connected together and enclosure
	Vibration resistance	10 to 150 Hz frequency, 0.7 mm 0.028 in amplitude in X, Y and Z directions for 80 min.
Shock resistance		300 m/s ² acceleration (30 G approx.) in X, Y and Z directions for three times each
Material	Enclosure: ABS, Indicator part: Acrylic	
Weight	Net weight: 50 g approx.	

Note: Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +20 °C **+68 °F**.

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

SAFETY COMPONENTS

PRESSURE SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

WIRE- SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC CONTROL DEVICES

LASER MARKERS

Selection Guide

Laser Displacement

HL-C2**HL-C1****LM10**

Magnetic Displacement

GP-X**GP-A**

Collimated Beam Sensors

HL-T1**LA-300****LA**

Other Products

SPECIFICATIONS


Controllers

Type	NPN output	PNP output		
Item	HL-AC1	HL-AC1P		
Applicable sensor head	HL-T1001A/T1001F, HL-T1005A/T1005F, HL-T1010A/T1010F			
Supply voltage / Current consumption	12 to 24 V DC ± 10 % Ripple P-P 10 % or less / 190 mA or less (when connected to the sensor head)			
Measuring cycle	150 μs			
Linear output	Current / voltage output switchable (Note 2) • During current output: 4 to 20 mA/F.S., Maximum load resistance: 300 Ω • During voltage output: ±4 V/F.S., Output impedance 100 Ω (In the monitor focus function, it can also be set at ±5 V, 0 to 5 V, etc.)			
Temperature characteristics	±0.2 % F.S./°C (Note 3)			
Settable average sampling rate (Note 4)	1 / 2 / 4 / 8 / 16 / 32 / 64 / 128 / 256 / 512 / 1,024 / 2,048 / 4,096			
Judgment outputs (HIGH, PASS, LOW)	NPN open-collector transistor • Maximum sink current: 50 mA • Applied voltage: 30 V DC or less (between judgment output and 0 V) • Residual voltage: 1.2 V or less (at 50 mA sink current)	PNP open-collector transistor • Maximum source current: 50 mA • Applied voltage: 30 V DC or less (between judgment output and +V) • Residual voltage: 2 V or less (at 50 mA source current)		
Utilization category	DC-12 or DC-13			
Number of outputs	HIGH / PASS / LOW 3 values output			
Output operation	HIGH: ON when measured value > HIGH threshold value PASS: ON when HIGH threshold value ≥ measured value ≥ LOW threshold value LOW: ON when LOW threshold value > measured value			
Short-circuit protection	Incorporated			
Laser OFF input	0 V connection: Laser emission halt Open: Laser emission • Applied voltage: 30 V DC or less (leak current: 0.1 mA or less)	+V connection: Laser emission halt Open: Laser emission • Applied voltage: 30 V DC or less (leak current: 0.1 mA or less)		
Zero reset input	0 V connection: Zero reset operates Open: Zero reset ineffective • Applied voltage: 30 V DC or less (leak current: 0.1 mA or less)	+V connection: Zero reset operates Open: Zero reset ineffective • Applied voltage: 30 V DC or less (leak current: 0.1 mA or less)		
Timing input	0 V connection: Effective Open: Ineffective • Applied voltage: 30 V DC or less (leak current: 0.1 mA or less)	+V connection: Effective Open: Ineffective • Applied voltage: 30 V DC or less (leak current: 0.1 mA or less)		
Reset input	0 V connection: Effective Open: Ineffective • Applied voltage: 30 V DC or less (leak current: 0.1 mA or less)	+V connection: Effective Open: Ineffective • Applied voltage: 30 V DC or less (leak current: 0.1 mA or less)		
Indicators	Laser emitting (LD ON)	Green LED (lights up during laser emission)		
	Judgment outputs	HIGH: Orange LED (lights up when measured value > HIGH threshold value) PASS: Green LED (lights up when HIGH threshold value ≥ measured value ≥ LOW threshold value) LOW: Yellow LED (lights up when LOW threshold value > measured value)		
	Enable (ENABLE)	Green LED (lights up during normal operation)		
	Zero reset (ZERO)	Green LED (lights up when the zero reset function is enabled)		
Main digital display	5 digit red LED display [RUN mode: Either the measured value (mm) or the hold value will be displayed. Reverse mode: The display orientation will be reversed.]			
Sub-digital display	5 digit yellow LED display [RUN mode: Either the resolution or laser beam reception amount will be displayed. THR mode: The threshold value will be displayed., Reverse mode: The display orientation will be reversed.]			
Main functions	<ul style="list-style-type: none"> Measured value display Setting value, light amount value resolution display Standard received light setting Automatic scaling Scaling 	<ul style="list-style-type: none"> Display reverse ECO display Display digits limitation Peak hold Bottom hold Peak to peak hold Self peak hold Self bottom hold 	<ul style="list-style-type: none"> Zero reset Initial reset ON-delay timer OFF-delay timer ONE SHOT timer Differentiation Sensitivity selection Threshold value direct setting 	<ul style="list-style-type: none"> Positioning teaching 2-level teaching Automatic teaching Hysteresis width variably Monitor focus Non-measuring time setting (A-B) calculation (Note 5)
Environmental resistance	Pollution degree	3 (industrial environment)		
	Ambient temperature	0 to +50 °C +32 to +122 °F (No dew condensation), Storage: -25 to +65 °C -13 to +149 °F		
	Ambient humidity	35 to 85 % RH, Storage: 35 to 85 % RH		
	EMC	EN 61000-6-2, EN 61000-6-4		
	Voltage withstandability	1,000 V AC for one min. between all supply terminals connected together and enclosure		
	Insulation resistance	20 MΩ, or more, with 500 V DC megger between all supply terminals connected together and enclosure		
	Vibration resistance	10 to 150 Hz frequency, 0.7 mm 0.028 in amplitude in X, Y and Z directions for 80 min.		
Shock resistance	300 m/s ² acceleration (30 G approx.) in X, Y and Z directions for three times each			
Material	Enclosure: Polybutylene terephthalate, Transparent cover: Polycarbonate			
I/O cable	0.09 mm ² 10-core composite cable, 2 m 6.562 ft long			
I/O cable extension	Extension up to total 10 m 32.808 ft is possible, with 0.09 mm ² or more, cable. (Note 6)			
Weight	Net weight: 140 g approx.			


Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +20 °C +68 °F.
 2) Switching between current and voltage is accomplished by a switch on the bottom of the controller.
 3) These are the temperature characteristics of the linear output when the sensor head is connected.
 4) The judgment output and linear output and linear output response time is calculated by (Measuring cycle) × (Set average sampling rate + 1).
 5) The calculation unit is necessary.
 6) If the extension cable is longer than 10 m 32.808 ft, then it will not qualify for CE marking.

I/O CIRCUIT DIAGRAMS

HL-AC1 NPN output type

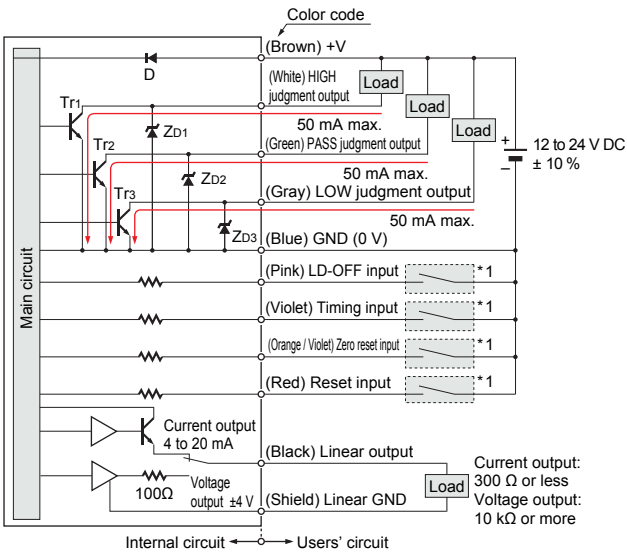

HL-AC1P PNP output type

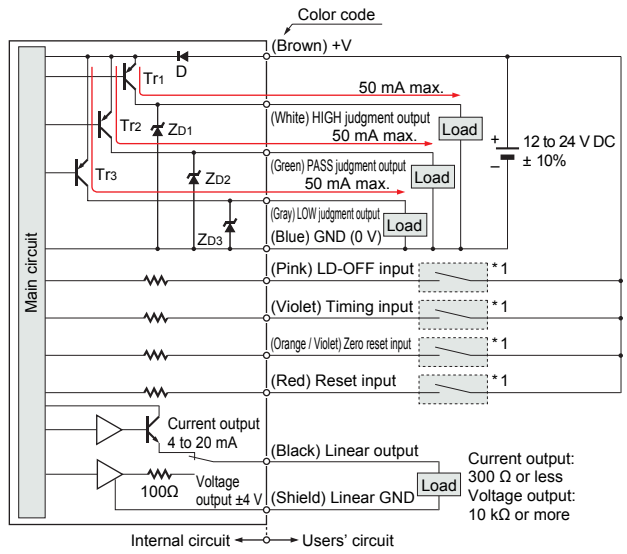

Symbols ... D: Reverse supply polarity protection diode
ZD1, ZD2, ZD3: Surge absorption zener diode
Tr1, Tr2, Tr3: NPN output transistor

Symbols ... D: Reverse supply polarity protection diode
ZD1, ZD2, ZD3: Surge absorption zener diode
Tr1, Tr2, Tr3: PNP output transistor

* 1
Non-voltage contact or NPN open-collector transistor

• LD-OFF input, Timing input, Zero reset input, Reset input
Low (0 to 1.5 V): Effective
High (+V or open): Ineffective


* 1
Non-voltage contact or PNP open-collector transistor

• LD-OFF input, Timing input, Zero reset input, Reset input
Low (0 V or open): Ineffective
High [+V to (+V - 1.5 V)]: Effective

SENSING CHARACTERISTICS (TYPICAL)


HL-T1001A HL-T1001F

Correlation between transverse deviation and output voltage

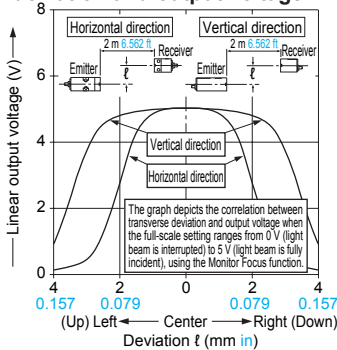


HL-T1005A HL-T1005F

Correlation between transverse deviation and output voltage

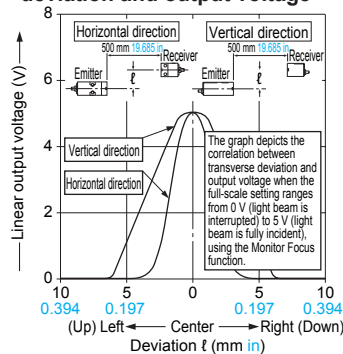


Correlation between interrupted beam width and output voltage

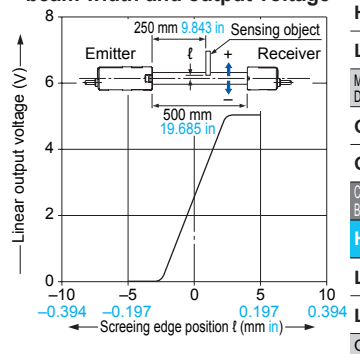


HL-T1010A HL-T1010F

Correlation between transverse deviation and output voltage

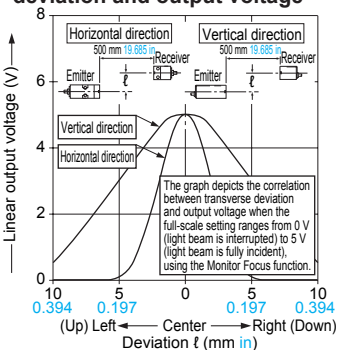

Correlation between interrupted beam width and output voltage

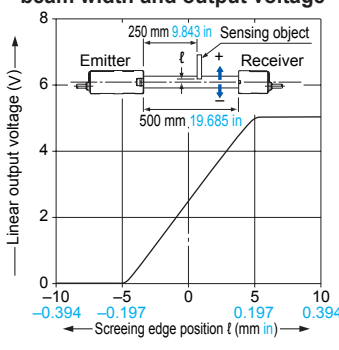


- FIBER SENSORS
- LASER SENSORS
- PHOTO-ELECTRIC SENSORS
- MICRO PHOTO-ELECTRIC SENSORS
- AREA SENSORS
- SAFETY COMPONENTS
- PRESSURE SENSORS
- INDUCTIVE PROXIMITY SENSORS
- PARTICULAR USE SENSORS
- SENSOR OPTIONS
- WIRE-SAVING SYSTEMS
- MEASUREMENT SENSORS
- STATIC CONTROL DEVICES
- LASER MARKERS


- Selection Guide
- Laser Displacement
- HL-C2
- HL-C1
- LM10
- Magnetic Displacement
- GP-X
- GP-A
- Collimated Beam Sensors
- HL-T1**
- LA-300
- LA
- Other Products

PRECAUTIONS FOR PROPER USE

Refer to p.1027 for general precautions and p.1025~ for laser beam.

- This catalog is a guide to select a suitable product. Be sure to read instruction manual attached to the product prior to its use.

- 
- Never use this product as a sensing device for personnel protection.
 - In case of using sensing devices for personnel protection, use products which meet laws and standards, such as OSHA, ANSI or IEC etc., for personnel protection applicable in each region or country.

- 
- This product is classified as a Class 1 Laser Product in IEC / JIS regulations and a Class II Laser Product in FDA regulations. Do not look at the laser beam through optical system such as a lens.
 - The following label is attached to the product. Handle the product according to the instruction given on the warning label.

クラス1レーザー製品
CLASS 1 LASER PRODUCT

(The English warning label based on FDA regulations is pasted on the FDA regulations conforming type.)

(The English warning label is packed with the sensor.)

Safety standards for laser beam products

- A laser beam can harm human being's eyes, skin, etc., because of its high energy density. IEC has classified laser products according to the degree of hazard and the stipulated safety requirements. The **HL-T1** series is classified as Class 1 laser. (Refer to p.1025~ for laser beam.)

Safe use of laser products

- For the purpose of preventing users from suffering injuries by laser products, IEC 60825-1: 2001 "Safety of laser products". Kindly check the standards before use. (Refer to P.1025~ for laser beam.)

Connection

- This product is made to satisfy the specifications when the sensor head is combined with the controller. In any other combination, not only may it not satisfy the specifications, but could be the cause of breakdown. So by all means, use it so that there is a combination of the sensor head and the controller.

Others

- This product outputs the judgment of the laser light analog quantity. Since there is variation in the light intensity between the center and the edges of the detection area, and the emitter side and the receiver side, the "display value" does not equal "the actual dimensions", so caution is necessary. Use the displayed dimensional value as a criterion.
- If the object being measured has a mirror surface or is a transparent body, it may be impossible to measure it accurately, so please exercise caution.
- Absolutely do not attempt to disassemble this product.

Functions



Function	Details
Zero reset function	The following tasks can be done by executing zero reset. <ul style="list-style-type: none"> • The display value can be set at "0". • The linear output when the display reads "0" is made the center output value of the 2 points set by monitor focus. (In the default state, the current output is 12 mA and the voltage output is 0 V.)
Auto scaling function	The auto scaling function selects whether to display the laser beam reception amount in the main-digital display in "mm" units or in "%" units, and determines whether the amount of laser beam received or the amount of laser beam interrupted is displayed. With the set standard laser beam reception amount as the reference value, the current laser beam reception amount (laser beam interrupted amount) is scaled automatically and is displayed as well as being output.
Standard received light setting	This function registers and stores the current laser beam reception amount in memory as the standard laser beam reception amount. The laser beam reception amount during full laser beam entry becomes the 100 % laser beam reception amount's full scale (F.S.). If this function is used, the display and the linear output are set on the full scale (F.S.) automatically. It can also be used to correct the laser beam reception amount when there is a change in the laser beam reception amount due to dirt, etc. on the front glass.
Scaling function	The scaling function is a function that changes the display value to the desired amount with respect to the setting value. At the desired distance, the display value can be input and changed.
Hysteresis width setting function	This function sets the hysteresis to the desired value.
Monitor focus function	With this function, the linear output range and inclination, etc. with respect to the display value can be specified. Setting is done by determining the 2 output values with respect to the desired display values.
Differential function	This function makes the amount of change in the measured value an output value. Use this function when measuring if you are paying attention to changes in measured values, as when counting the number of workpieces, etc.
Display reverse function	The digital display's direction can be selected. The forward direction or the reverse direction to match the direction of installation on the equipment can be selected.
ECO display function	This function makes the display dark and saves electric power.
Display digits limitation function	This determines the number of display digits in the main-digital and sub-digital displays. If the number of digits is limited, the digits are turned off beginning with the lowest order digit.
Zero reset memory function	This selects whether or not to save the zero reset level in memory when the power is turned OFF. If you desire to reproduce the zero reset level from the previous operating session when you turn the power ON again, then enable this function. If this function is enabled, the zero reset level data are written into the EEPROM each time.
Key lock function	The controller's key input can be disabled. Once the key input is disabled, the controller will not accept any key inputs until the key lock is released. Use this function to avoid changing the setting by mistake.

DIMENSIONS (Unit: mm in)

The CAD data in the dimensions can be downloaded from the SUNX website: <http://www.sunx.com>

HL-T1001A(F) HL-T1005A(F)



Sensor head

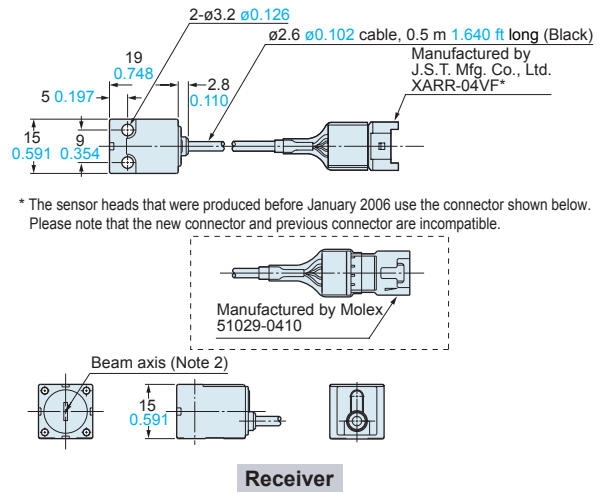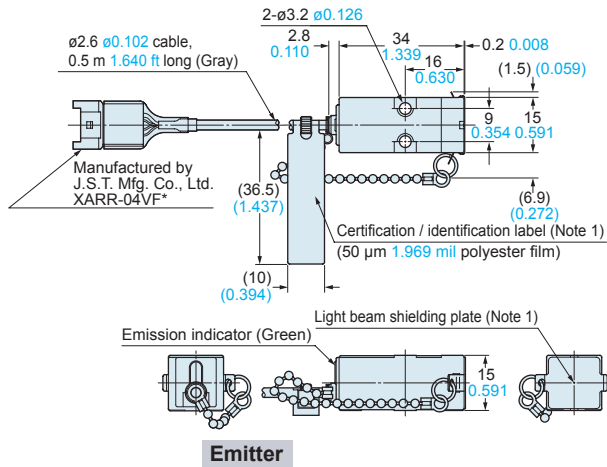

Notes: 1) IEC / JIS conforming products do not contain light beam shielding plate, or certification / identification label.
2) The receiver of HL-T1001A(F) does not incorporate a slit.

HL-T1010A HL-T1010F

Sensor head

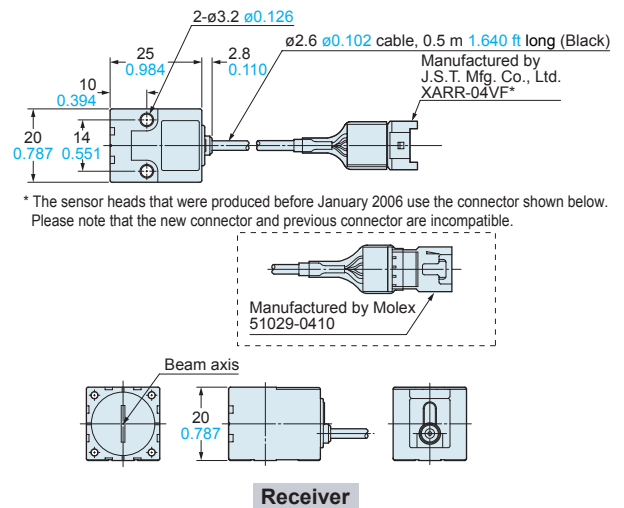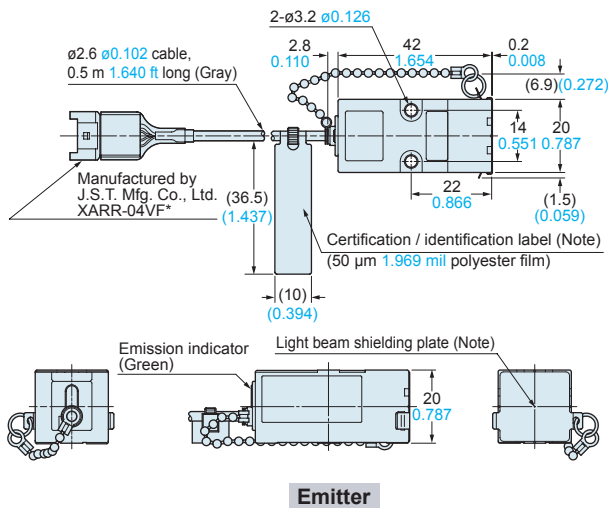


Note: IEC / JIS conforming products do not contain light beam shielding plate, or certification / identification label.

HL-AC1 HL-AC1P


Controller

Mounting drawing with a mounting bracket MS-HLAC1-1 (Optional)

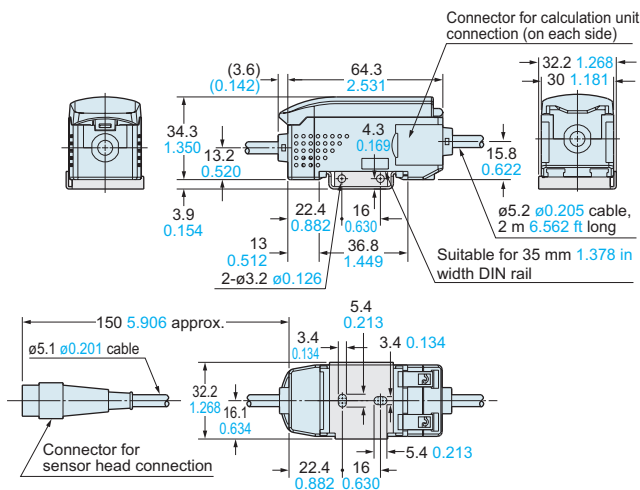

HL-AC1-CL

Calculation unit (Optional)

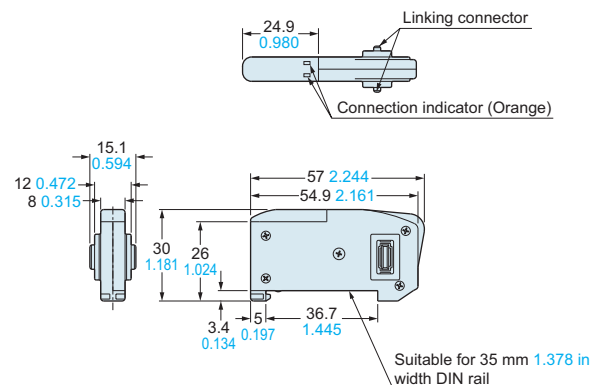

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

SAFETY COMPONENTS

PRESSURE SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

WIRE- SAVING SYSTEMS

MEASURE- MENT SENSORS

STATIC CONTROL DEVICES

LASER MARKERS

Selection Guide

Laser Displacement

HL-C2

HL-C1

LM10

Magnetic Displacement

GP-X

GP-A

Collimated Beam Sensors

HL-T1

LA-300

LA

Other Products


- FIBER SENSORS
- LASER SENSORS
- PHOTO-ELECTRIC SENSORS
- MICRO PHOTO-ELECTRIC SENSORS
- AREA SENSORS
- SAFETY COMPONENTS
- PRESSURE SENSORS
- INDUCTIVE PROXIMITY SENSORS
- PARTICULAR USE SENSORS
- SENSOR OPTIONS
- WIRE-SAVING SYSTEMS
- MEASUREMENT SENSORS
- STATIC CONTROL DEVICES
- LASER MARKERS
- Selection Guide
- Laser Displacement
- HL-C2**
- HL-C1**
- LM10**
- Magnetic Displacement
- GP-X**
- GP-A**
- Collimated Beam Sensors
- HL-T1**
- LA-300**
- LA**
- Other Products

DIMENSIONS (Unit: mm in)

The CAD data in the dimensions can be downloaded from the SUNX website: <http://www.sunx.com>

MS-HLT1-1


Sensor head mounting bracket for HL-T1001A(F) / HL-T1005A(F) [Accessory for HL-T1001A(F) / HL-T1005A(F)]

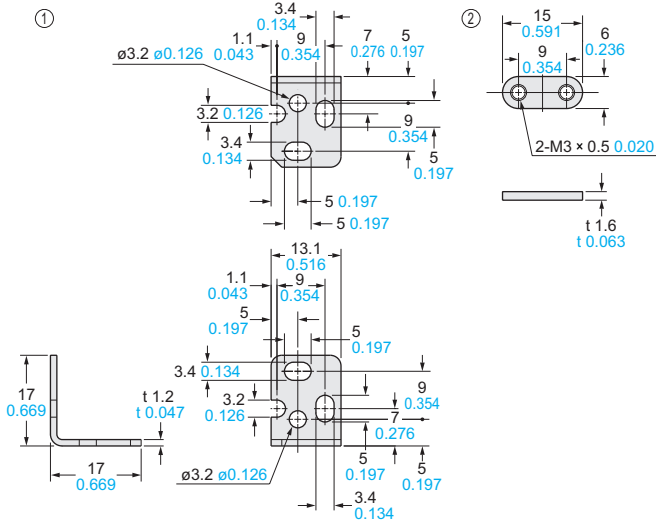

Material: Cold rolled carbon steel (SPCC) (Uni-chrome plated)
Two M3 (length 20 mm 0.787 in) screws with washers are attached.


Assembly dimensions

Mounting drawing with HL-T1005A's receiver

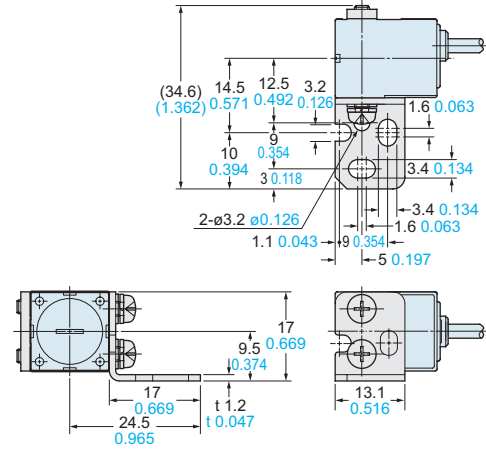

MS-LA3-1


Sensor head mounting bracket for HL-T1010A(F) [Accessory for HL-T1010A(F)]

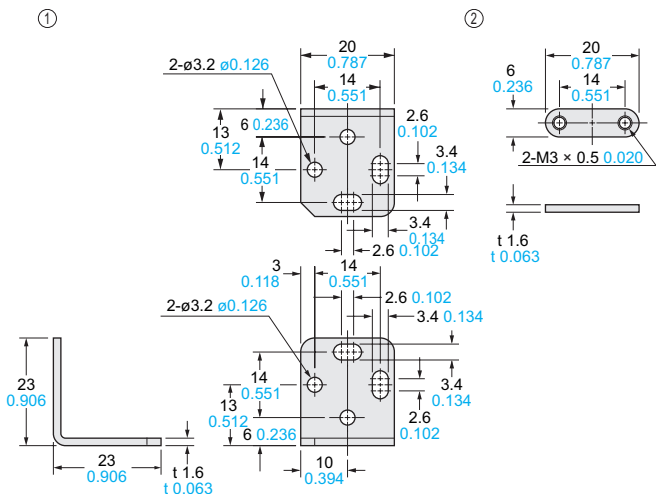

Material: Cold rolled carbon steel (SPCC) (Uni-chrome plated)
Two M3 (length 25 mm 0.984 in) screws with washers are attached.


Assembly dimensions

Mounting drawing with HL-T1010A's receiver

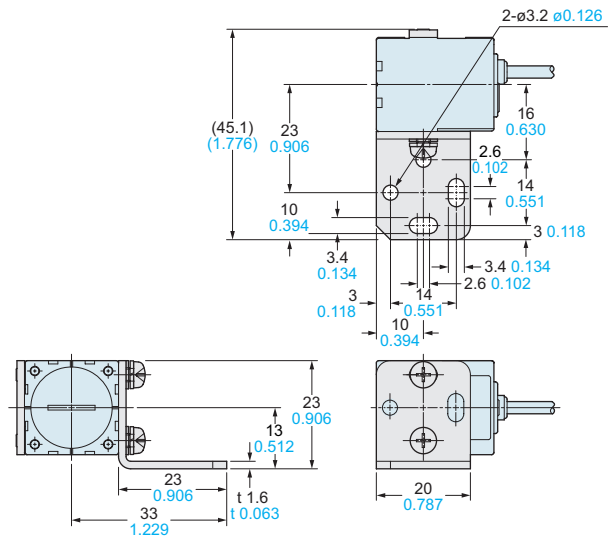


MS-HLAC1-1

Controller mounting bracket (Optional)

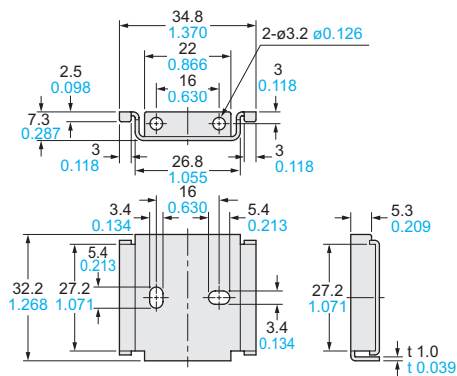


CN-HLT1-1

Sensor head to controller connection cable (Accessory for sensor head)

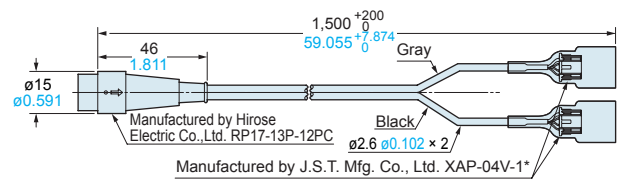

* The sensor heads that were produced before January 2006 use the connector shown below. Please note that the new connector and previous connector are incompatible.





DIMENSIONS (Unit: mm in) The CAD data in the dimensions can be downloaded from the SUNX website: <http://www.sunx.com>

HL-T1SV1 Side-view attachment for **HL-T1001A(F)** / **HL-T1005A(F)** (Optional)

Assembly dimensions

Mounting drawing with **HL-T1005A's** receiver

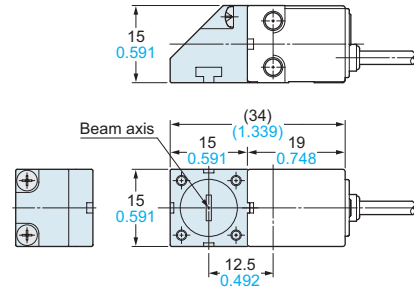
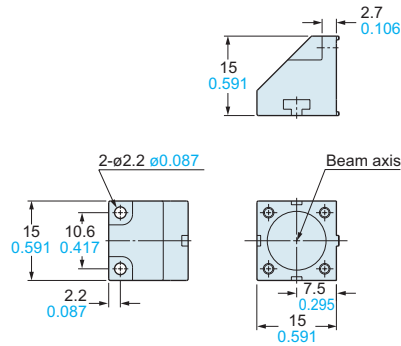


Material: Polyetherimide (Enclosure), Glass (Front cover)
Two M2 (length 6 mm 0.236 in) screws with washers are attached.

HL-T1SV2 Side-view attachment for **HL-T1010A(F)** (Optional)

Assembly dimensions

Mounting drawing with **HL-T1010A's** receiver

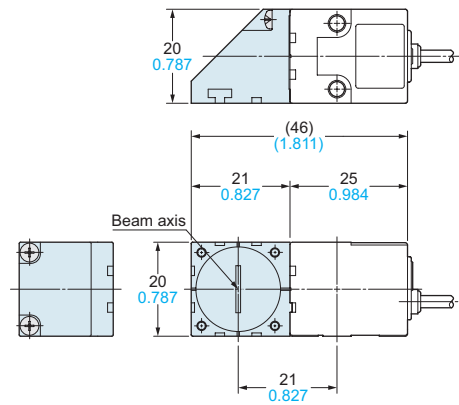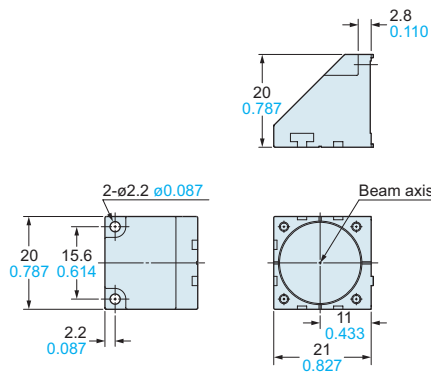

Material: Polyetherimide (Enclosure), Glass (Front cover)
Two M2 (length 6 mm 0.236 in) screws with washers are attached.

- FIBER SENSORS
- LASER SENSORS
- PHOTO-ELECTRIC SENSORS
- MICRO PHOTO-ELECTRIC SENSORS
- AREA SENSORS
- SAFETY COMPONENTS
- PRESSURE SENSORS
- INDUCTIVE PROXIMITY SENSORS
- PARTICULAR USE SENSORS
- SENSOR OPTIONS
- WIRE-SAVING SYSTEMS
- MEASUREMENT SENSORS
- STATIC CONTROL DEVICES
- LASER MARKERS
- Selection Guide
- Laser Displacement
- HL-C2**
- HL-C1**
- LM10**
- Magnetic Displacement
- GP-X**
- GP-A**
- Collimated Beam Sensors
- HL-T1**
- LA-300**
- LA**
- Other Products