






Main/Emergency-Off Switches

- Front mounting switches with single hole mounting
- 3 up to 8 pole
- 20 A up to 63 A
- IP66








Switching programme	Rated data (IEC 60947)			Mounting dimension (mm)	Padlock device N-handle yellow/red	Padlock device M-handle yellow/red	Padlockable handle V-handle yellow/red
	Operat. current I_e	Operational power (at 380–440 V)			 IP66	 IP66	 IP66
	AC-21A (A)	AC-23A (kW)	AC-3 (kW)		Order code number	Order code number	Order code number
41300 – 3 pole – without auxiliary contacts 	20	5.5	3.7	∅ 22.5	H216-41300-206N4	H216-41300-206M4	H216-41300-206V4
	20	5.5	3.7	∅ 30.5	H216-41300-216N4	H216-41300-216M4	H216-41300-216V4
	25	7.5	5.5	∅ 22.5	H220-41300-206N4	H220-41300-206M4	H220-41300-206V4
	25	7.5	5.5	∅ 30.5	H220-41300-216N4	H220-41300-216M4	H220-41300-216V4
	32	11	7.5	∅ 22.5	H226-41300-206N4	H226-41300-206M4	H226-41300-206V4
	32	11	7.5	∅ 30.5	H226-41300-216N4	H226-41300-216M4	H226-41300-216V4
	40	15	11	∅ 22.5	H233-41300-206N4	H233-41300-206M4	H233-41300-206V4
	40	15	11	∅ 22.5	B240-41300-206N4*	B240-41300-206M4*	B240-41300-206V4*
	40	15	11	∅ 30.5	H233-41300-216N4	H233-41300-216M4	H233-41300-216V4
	40	15	11	∅ 30.5	B240-41300-216N4*	B240-41300-216M4*	B240-41300-216V4*
	50	18.5	15	∅ 22.5	B250-41300-206N4	B250-41300-206M4	B250-41300-206V4
	50	18.5	15	∅ 30.5	B250-41300-216N4	B250-41300-216M4	B250-41300-216V4
	63	22	18.5	∅ 22.5	B263-41300-206N4	B263-41300-206M4	B263-41300-206V4
	63	22	18.5	∅ 30.5	B263-41300-216N4	B263-41300-216M4	B263-41300-216V4
41400 – 4 pole – without auxiliary contacts – neutral contact early make/late break 	20	5.5	3.7	∅ 22.5	H216-41400-206N4	H216-41400-206M4	H216-41400-206V4
	20	5.5	3.7	∅ 30.5	H216-41400-216N4	H216-41400-216M4	H216-41400-216V4
	25	7.5	5.5	∅ 22.5	H220-41400-206N4	H220-41400-206M4	H220-41400-206V4
	25	7.5	5.5	∅ 30.5	H220-41400-216N4	H220-41400-216M4	H220-41400-216V4
	32	11	7.5	∅ 22.5	H226-41400-206N4	H226-41400-206M4	H226-41400-206V4
	32	11	7.5	∅ 30.5	H226-41400-216N4	H226-41400-216M4	H226-41400-216V4
	40	15	11	∅ 22.5	H233-41400-206N4	H233-41400-206M4	H233-41400-206V4
	40	15	11	∅ 22.5	B240-41400-206N4*	B240-41400-206M4*	B240-41400-206V4*
	40	15	11	∅ 30.5	H233-41400-216N4	H233-41400-216M4	H233-41400-216V4
	40	15	11	∅ 30.5	B240-41400-216N4*	B240-41400-216M4*	B240-41400-216V4*
	50	18.5	15	∅ 22.5	B250-41400-206N4	B250-41400-206M4	B250-41400-206V4
	50	18.5	15	∅ 30.5	B250-41400-216N4	B250-41400-216M4	B250-41400-216V4
	63	22	18.5	∅ 22.5	B263-41400-206N4	B263-41400-206M4	B263-41400-206V4
	63	22	18.5	∅ 30.5	B263-41400-216N4	B263-41400-216M4	B263-41400-216V4

* larger terminal capacity, see page 154

Further switching programmes from page 132.

Disconnect Switches



Main/Emergency-Off Switches **Front mounting** Single hole mounting

Switching programme	Rated data (IEC 60947)			Mounting dimension (mm)	Padlock device N-handle yellow/red	Padlock device M-handle yellow/red	Padlockable handle V-handle yellow/red
	Operat. current I_e	Operational power (at 380–440 V)			 IP66	 IP66	 IP66
	AC-21A (A)	AC-23A (kW)	AC-3 (kW)		Order code number	Order code number	Order code number
41600 – 6 pole – without auxiliary contacts 	20	5.5	3.7	∅ 22.5	H216-41600-206N4	H216-41600-206M4	–
	20	5.5	3.7	∅ 30.5	H216-41600-216N4	H216-41600-216M4	H216-41600-216V4
	25	7.5	5.5	∅ 22.5	H220-41600-206N4	H220-41600-206M4	–
	25	7.5	5.5	∅ 30.5	H220-41600-216N4	H220-41600-216M4	H220-41600-216V4
	32	11	7.5	∅ 22.5	H226-41600-206N4	H226-41600-206M4	–
	32	11	7.5	∅ 30.5	H226-41600-216N4	H226-41600-216M4	H226-41600-216V4
	40	15	11	∅ 22.5	H233-41600-206N4	H233-41600-206M4	–
	40	15	11	∅ 30.5	H233-41600-216N4	H233-41600-216M4	H233-41600-216V4
41800 – 8 pole – without auxiliary contacts – 2 neutral contacts early make/late break 	20	5.5	3.7	∅ 22.5	H216-41800-206N4	H216-41800-206M4	–
	20	5.5	3.7	∅ 30.5	H216-41800-216N4	H216-41800-216M4	H216-41800-216V4
	25	7.5	5.5	∅ 22.5	H220-41800-206N4	H220-41800-206M4	–
	25	7.5	5.5	∅ 30.5	H220-41800-216N4	H220-41800-216M4	H220-41800-216V4
	32	11	7.5	∅ 22.5	H226-41800-206N4	H226-41800-206M4	–
	32	11	7.5	∅ 30.5	H226-41800-216N4	H226-41800-216M4	H226-41800-216V4
	40	15	11	∅ 22.5	H233-41800-206N4	H233-41800-206M4	–
	40	15	11	∅ 30.5	H233-41800-216N4	H233-41800-216M4	H233-41800-216V4

Further switching programmes from page 132.

Dimensions in mm:

Setup of order code number		
Type	Switching progr.	Mtg. form
H226	41300	206N4
Order code no.	H226-41300-206N4	

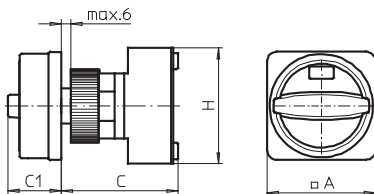

Switching programmes 3 and 4 pole

Types H216 / H220 / H226 / H233:

Mtg. form	A	B	B1	B2	C	C1	D1	G1	G2	H
206M4	67	36	48	60	75	38	22.5	24.2	3.2	70
206N4	67	36	48	60	75	33	22.5	24.2	3.2	70
206V4	48	36	48	60	75	32	22.5	24.2	3.2	70
216M4	67	36	48	60	75	38	30.5	33	4.8	70
216N4	67	36	48	60	75	33	30.5	33	4.8	70
216V4	64	36	48	60	75	39	30.5	33	4.8	70

Types B240 / B250 / B263:

Mtg. form	A	B	B1	B2	C	C1	D1	G1	G2	H
206M4	67	50	69	88	75	38	22.5	24.2	3.2	72
206N4	67	50	69	88	75	33	22.5	24.2	3.2	72
206V4	48	50	69	88	75	32	22.5	24.2	3.2	72
216M4	67	50	69	88	75	38	30.5	33	4.8	72
216N4	67	50	69	88	75	33	30.5	33	4.8	72
216V4	64	50	69	88	75	39	30.5	33	4.8	72

Switching programmes 6 and 8 pole

Types H216 / H220 / H226 / H233:

Mtg. form	A	B	B1	B2	C	C1	D1	G1	G2	H
206M4	67	72	84	96	83	38	22.5	24.2	3.2	70
206N4	67	72	84	96	83	33	22.5	24.2	3.2	70
216M4	67	72	84	96	83	38	30.5	33	4.8	70
216N4	67	72	84	96	83	33	30.5	33	4.8	70
216V4	64	72	84	96	83	39	30.5	33	4.8	70