

# **DYNA** *GEAR* **D37** **NEW**

*Dynamic and Precision in small format*




# Highlights


# DYNA GEAR D37

The design of the DynaGear series has been influenced by extremely varied applications within many industry sectors. With the DynaGear D37 we created an additional size, which is designed for highly dynamic servo drive solutions in compact applications.


- Right angle gearbox, single-stage, ratios from 3:1 to 15:1.
- The compact and rigid design ensures highest performance whilst being space and weight efficient.
- Lubricated for life, the gearboxes are virtually maintenance-free (when used under normal conditions).
- The high efficiency rating of 96% saves energy costs.



Optimized contact pattern assembly for uniform load distribution



Optimized Gleason hypoid-gearing for high torque ratings and low backlash

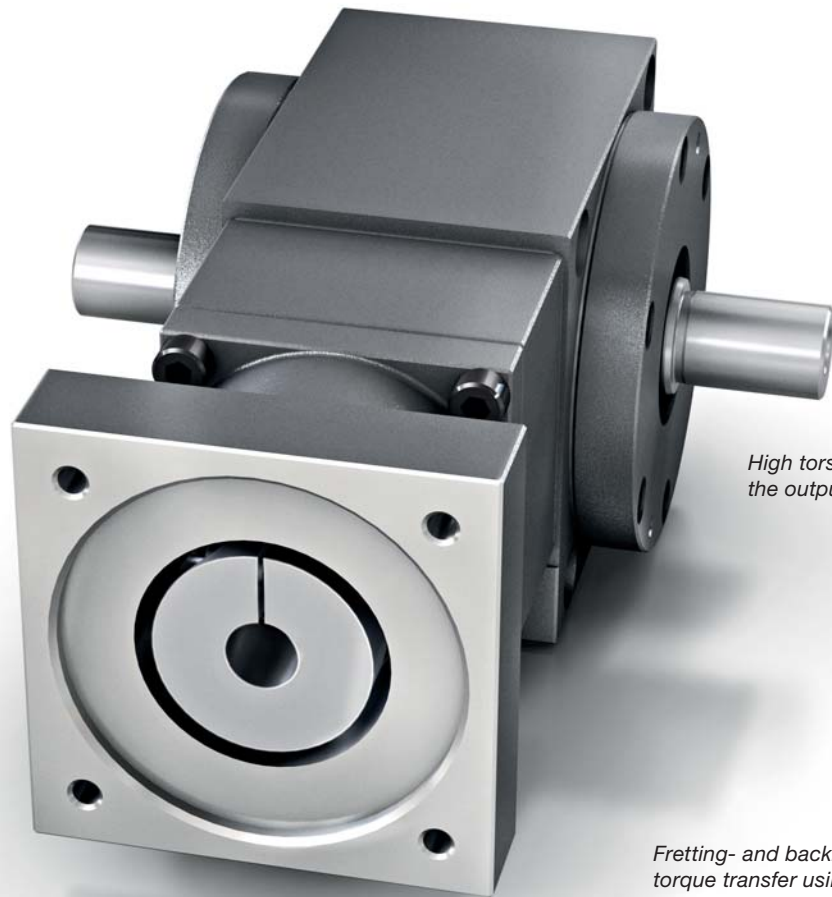

High torsional stiffness at the output

Fretting- and backlash-free torque transfer using a friction-locked fit between shaft and hub


Small moments of inertia at the input

System optimization via variable torsional coupling stiffness


# Dimensions and Configurations

# DYNA GEAR D37


## Input without flange, without coupling

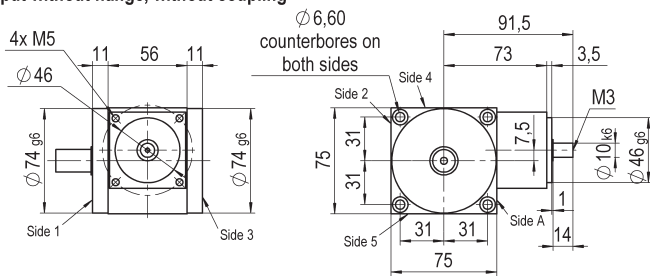


## Output with solid shaft

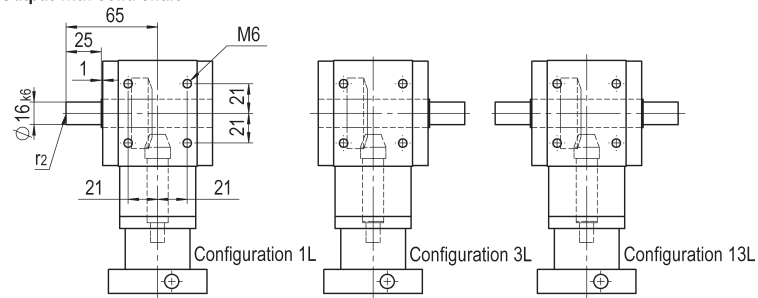

## Input with flange and coupling

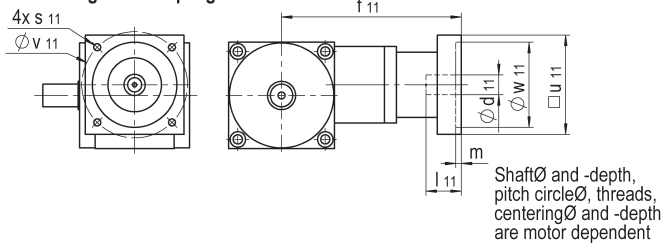

## Output with hollow shaft

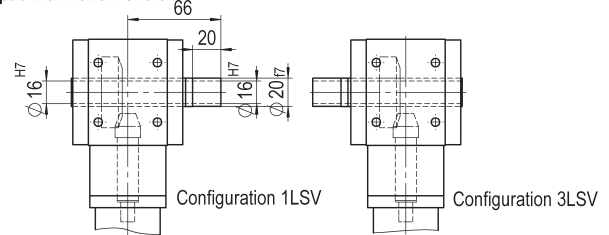

## Performance table/Technical data

### DynaGear D37

Size		D37	D37
Ratio	i	3/4/5/6/8/10	12/15
<b>Output torque</b>			
Nominal torque	T <sub>2N</sub> [Nm]	22	15
Maximum acceleration ④	T <sub>2B</sub> [Nm]	33	22
Emergency stop torque ③	T <sub>2Not</sub> [Nm]	44	30
Maximum input speed	n <sub>1max</sub> [min <sup>-1</sup> ]	8000	8000
Nominal input speed	i = 3/4/5	n <sub>1N</sub> [min <sup>-1</sup> ]	2300
	i = 6/8/10	n <sub>1N</sub> [min <sup>-1</sup> ]	3700
	i = 12/15	n <sub>1N</sub> [min <sup>-1</sup> ]	4500
Standard backlash ①	j <sub>t</sub> [arcmin]	< 5	< 5
Reduced backlash ①	j <sub>t</sub> [arcmin]	< 3	< 3
Backlash stiffness at the output ⑤	C <sub>21</sub> [Nm/arcmin]	1,3	1,3
Radial force ②	F <sub>2Rmax</sub> [N]	2200	2200
Axial force ②	F <sub>2Amax</sub> [N]	1100	1100
Efficiency rating at full load	η [%]	> 96	> 93
Noise level (n <sub>1</sub> =3000 min <sup>-1</sup> )	L <sub>pA</sub> [dB(A)]	≤ 65	≤ 65
Weight approx.	m [kg]	1,9	1,9

<b>Service life (SL) [h]:</b>	> 30.000 based on operation mode S5
<b>Lubrication:</b>	Lubricated for life, closed system
<b>Mounting positions:</b>	Any
<b>Operating temperature:</b>	-10°C to 90°C
<b>Paint:</b>	Primary coated RAL 9005 – dull black
<b>Ex-protection:</b>	Ex II 2 D/G c T4
<b>Type of protection:</b>	IP 64

① at the output, at 2 % load or max 10 Nm

② resulting force centre of output shaft at output speed 400 min<sup>-1</sup>

③ max 1000 times during the service life of the gearbox

④ at max 1000 cycles per hour, please consider reducing factor in other cases


⑤ at nominal torque (DynaGear without coupling)

## Mass moment of inertia I<sub>1</sub> [kgcm<sup>2</sup>] (values without coupling)

Ratio i	Size D37
3:1	0,178
4:1	0,140
5:1	0,123
6:1	0,113

Ratio i	Size D37
8:1	0,104
10:1	0,099
12:1	0,097
15:1	0,095

## **BEVEL GEAR**



### **Spiral, Hypoid and Zerol Bevel Gears**

- Standard range of products and custom-made versions
- Module ms from 0.5 to 12
- Diameters up to 410 mm
- Shaft angles from 10° to 170°
- More than 60 years of experience
- In-house gearing calculations
- We manufacture to your drawing or advise you of possible alternatives
- Milled or ground gear tooth cutting

## **POWER GEAR**



### **The high performance bevel gearbox**

- High torque, small size
- For highest input speeds
- Ratios from  $i = 1:1$  to  $5:1$
- Torques up to 7000 Nm
- Output via solid and hollow shaft
- Motor mounting either directly or via coupling and lantern
- Variable ratios and uniform dimensions

## **DYNA GEAR**



### **The highly dynamic servo right angle gearbox**

- Hypoid gearing
- High input speeds at medium to high torques
- Ratios single-stage  $i = 3:1$  to  $30:1$
- Ratios, two-stage, up to  $150:1$
- Torques up to 1440 Nm
- Flexible motor mounting via coupling and lantern
- Low backlash < 2 arcmin
- Variable ratios and uniform dimensions

## **DYNA GEAR<sup>Economy</sup>**



### **The cost-effective servo right angle gearbox**

- Hypoid gearing
- High input speeds at medium torques
- Ratios single-stage  $i = 5:1, 8:1, 10:1$  and  $15:1$
- Torques up to 260 Nm
- Flexible motor mounting via coupling and lantern
- Backlash < 6 arcmin
- Variable ratios and uniform dimensions


## **DESIGN GEAR**



### **The customised gearbox**

- Single-stage gearbox available as gear-change or reversing gearbox
- Forced oil circulation lubrication system gearbox for high speeds and torques
- Labyrinth sealed gearbox with an efficiency of > 99%
- Special gearbox with additional functional elements
- Endless possibilities on request

## **KS TWIN GEAR**



### **The bevel helical gearbox**

- Two-stage bevel helical gearbox with ratios of up to  $75:1$
- Torques up to 7500 Nm
- Torsional backlash < 6 arcmin
- Compact design
- Motor mounting either directly or via coupling and lantern
- High input speeds at high torques
- Variable ratios and uniform dimensions