

NEW INPUT COUPLING


SO EASY! Direct mounting - No settings - No screw

1



PATENTED




2

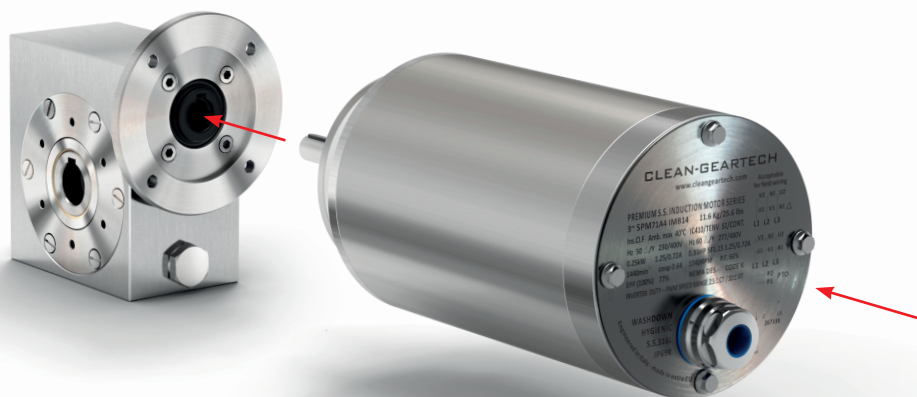

3






Available as an option for the motor range from IEC 56 to IEC 112
Disponibile come opzione per motori da IEC 56 a IEC 112




GROUP

INPUT
DIAMETER ØMATERIAL
P = Polymer
Z = Zamak

Z30	I30	-	KA	09	P	
				11	P	
Z45	I45	-	KB	09	P	
				11	P	
				14	P	
Z50	I50	-	KC	09	P	
				11	P	
				14	P	
				19	Z	
Z63	I63	X42I	KD	11	P	
				14	P	
				19	P	
				24	Z	
Z85	-	X62I	KE	14	P	
				19	P	
				24	Z	
				28	Z	

* While using these couplings, replace the motor shaft key with the shorter one supplied with the kit.

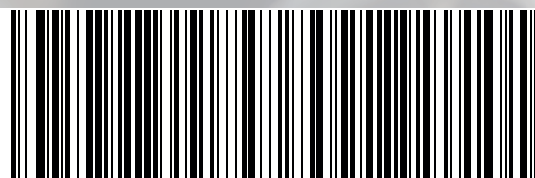

DP - PBMG - CGT017 - EN